



Chorus UFB Services Agreement
Bitstream Services: Service Description for
Bitstream 3 Accelerate

Reference Offer
June 2014

1 Interpretation

- 1.1 References to clauses or sections are references to clauses or sections in this Service Description unless expressly provided otherwise. The definitions set out in the General Terms and the Operations Manual apply to this Service Description unless expressly provided otherwise.
- 1.2 References to the Operations Manual are references to the operations manual for the Bitstream Services.

2 The Bitstream 3 Accelerate Service

- 2.1 The Bitstream 3 Accelerate Service is a single-class bitstream service suitable for complex business grade applications and premium residential products delivered over a shared fibre access. Bitstream 3 Accelerate is part of the UFB family of bitstream services:

Bitstream 2	Based on the TCF Mass Market service.
Bitstream 2 Accelerate	Based on the TCF Mass Market service with enhanced low priority options.
Bitstream 3	Based on the TCF Business service.
Bitstream 3 Accelerate	Based on the TCF Business service.
Bitstream 3P2P	Based on the TCF Business service.
Bitstream 3a	Based on the TCF Business service with Low Priority options.
Bitstream 3aP2P	Based on the TCF Business service with Low Priority options.
Bitstream 3a Accelerate	Based on the TCF Business service with Low Priority options.
Bitstream 4	Based on the TCF Business Premium service.
UFB Handover Connection	Based on the TCF E-NNI specification.
Multicast	Based on the TCF Ethernet Multicast Access (EMA) service.
ATA Voice	An analogue telephone access service.
UNI Voice (128/128)	Low speed Bitstream service for telephony access service.

- 2.2 A diagram of the configuration for the Bitstream 3 Accelerate Service is set out in Appendix A. The Bitstream 3 Accelerate Service provides an Ethernet bitstream service from the UNI at the End User Premises or Service Provider Premises or NBAP (as applicable) to the UFB Handover Connection Service located at the POI that enables a Service Provider to access and interconnect with the LFC Network.
- 2.3 The Bitstream 3 Accelerate Service is an input service which a Service Provider can combine with other LFC services (or with the Service Provider's own network or wholesale services provided by other service providers) to provide fibre based telecommunications services to End Users.
- 2.4 The Bitstream 3 Accelerate Service has the following key characteristics:

- 2.4.1 The Bitstream 3 Accelerate Service includes one or more Ethernet E-APL bitstream services delivered in conjunction with Baseband over GPON. In particular:
- (a) each Ethernet E-APL bitstream service allows up to 4093 VLANs to be passed transparently between the UNI and the E-NNI; and
 - (b) the Baseband service supports up to two instances of the ATA Voice Service.
- 2.4.2 Support for one class of traffic, High Priority.
- 2.4.3 A single Service Template is initially offered, as detailed under clause 3.6.4, consisting of a single Ethernet E-APL bitstream with a range of bandwidth options and a single ATA Voice Service package with the option to create modified or new Service Templates using 'core building blocks' and the Product Development Process.
- 2.4.4 Supports tagged or untagged frames at the UNI.
- 2.4.5 Complies with the Business service specified in the *TCF Ethernet Access Service Description v24, 19 January 2011*.

3 Bitstream 3 Accelerate Service and implementation activities

Installation Services

- 3.1 The Bitstream 3 Accelerate Service includes a Standard Install ¹ as set out in the Operations Manual. The LFC will provide Non-Standard Installs as an ancillary service.

Termination Point

- 3.2 The Bitstream 3 Accelerate Layer 1 and Layer 2 termination points are set out in the Operations Manual.

Testing

- 3.3 The LFC will test the Fibre Lead-in from the termination point at the Premises, as referred to in the Operations Manual, to the Central Office where the access node is located to ensure the fibre is within the technical specification for fibre set out in Appendix B.
- 3.4 The LFC will perform a functional test of the Bitstream 3 Accelerate Service at the Layer 2 termination point at the Premises referred to in the Operations Manual.

Additional Services

- 3.5 If the Service Provider requires additional services such as:
- (a) a Non-Standard Install which includes (where required):
 - (i) the installation of the Fibre Lead-in where there is no existing fibre cabling and the installation is outside the parameters set out in the Operations Manual; or
 - (ii) installation of specialised termination equipment in an NBAP; or
 - (iii) installation of Fibre-Lead-in diversity at an Premises or NBAP (as applicable) (from the FAP to the ETP or OFDF as applicable);
 - (b) provision of diversity to Premises or NBAP (as applicable) (when the second or subsequent instance of the Bitstream 3 Accelerate Service is purchased);
 - (c) any Premises wiring services; or
 - (d) installation and testing of Service Provider equipment and services,

¹ Standard Install parameters may differ between LFCs

then the LFC may be able to provide items (c) and (d) on request subject to terms to be agreed between the LFC and the Service Provider. Item (a) and (b) are available on terms as set out in this Agreement.

Core Bitstream 3 Accelerate Service

3.6 The core bitstream services provided as part of the Bitstream 3 Accelerate Service are as follows:

- 3.6.1 An Ethernet E- APL Service that supports transparent pass-through of 802.1Q frames on a designated UNI on the ONT at the End User Premises, Service Provider Premises or NBAP (as applicable).
- 3.6.2 Delivered over a single 802.1ad SVLAN on the E-NNI at the POI.
- 3.6.3 All tagged and untagged traffic sent from the End User is treated as High Priority.
- 3.6.4 One initial Service Template is available consisting of a Baseband Service with one instance of the ATA Voice Service and one Ethernet E-APL bitstream service, using the following parameters:
 - (a) Access Rate; and
 - (b) service bandwidth,as set out in the table below:

<u>Access Rate</u> (100/100)	<u>ATA^[1]</u> ports	<u>Headline</u>		<u>Low Priority Downstream</u>				<u>Low Priority Upstream</u>				<u>High Priority Downstream</u>				<u>High Priority Upstream</u>				
		<u>Low Priority</u> (Mbps) <u>DS/US</u>	<u>High Priority</u> (Mbps) <u>DS/US</u>	<u>CIR + EIR</u>	<u>EBS</u>	<u>CIR</u>	<u>CBS</u>	<u>CIR + EIR</u>	<u>EBS</u>	<u>CIR</u>	<u>CBS</u>	<u>EIR</u>	<u>EBS</u>	<u>CIR</u>	<u>CBS</u>	<u>EIR</u>	<u>EBS</u>	<u>CIR</u>	<u>CBS</u>	
				Mbps	kB	Mbps	kB	Mbps	kB	Mbps	kB	Mbps	kB	Mbps	kB	Mbps	kB	Mbps	kB	
Business 4	1	0/0	2.5/2.5	0	0	0	0	0	0	0	0	0	0	0	2.5	32	0	0	2.5	32
		0/0	10/10	0	0	0	0	0	0	0	0	0	0	0	10	32	0	0	10	32
		0/0	20/20	0	0	0	0	0	0	0	0	0	0	0	20	32	0	0	20	32
		0/0	30/30	0	0	0	0	0	0	0	0	0	0	0	30	32	0	0	30	32
		0/0	40/40	0	0	0	0	0	0	0	0	0	0	0	40	32	0	0	40	32
		0/0	50/50	0	0	0	0	0	0	0	0	0	0	0	50	32	0	0	50	32
		0/0	60/60	0	0	0	0	0	0	0	0	0	0	0	60	38	0	0	60	38
		0/0	70/70	0	0	0	0	0	0	0	0	0	0	0	70	44	0	0	70	44
		0/0	80/80	0	0	0	0	0	0	0	0	0	0	0	80	50	0	0	80	50
		0/0	90/90	0	0	0	0	0	0	0	0	0	0	0	90	57	0	0	90	57
0/0	100/100	0	0	0	0	0	0	0	0	0	0	0	100	63	0	0	100	63		

^[1] The ATA service is as described in the ATA Voice Service Description except that the High Priority frames are tagged with PCP 5.

3.6.5 The Bitstream 3 Accelerate Service has similar characteristics to the other services within the UFB family of Bitstream services as identified below:

Attribute	Bitstream 2 Bitstream 2 Accelerate	Bitstream 3 Bitstream 3 Accelerate	Bitstream 3a Bitstream 3a Accelerate	Bitstream 4
Bitstream	E-AVPL	E-APL	E-APL	E-APL
High Priority	Yes	Yes	Yes	Yes
Low Priority	Yes	No	Yes	No
Service Bandwidths* (reference offer)	From 30/10 Mbps up to 100/50 Mbps	From 2.5Mbps up and downstream to 100/100 Mbps	100/100 Mbps with High Priority from 2.5Mbps	From 1 Mbps up to 10 GigE
Service Bandwidths (Accelerate)*	From 30/10 Mbps up to 100/50 Mbps Low Priority + High Priority CIR up to 100/50 Mbps	From 2.5Mbps up and downstream to 100/100 Mbps	From 100/100 Mbps up to 1000/1000 Mbps with High Priority from 2.5Mbps up to 100/100 Mbps	N/A
MTU	2000 Bytes	2000 Bytes	2000 Bytes	9100
MAC addresses	16	64	64	Unlimited
Number of available UNIs	4 standard	4 standard	4 standard	1 with a second UNI available on request
L2CP support	No	No	No	Limited
Diversity	On request with limited availability	On request with limited availability	On request with limited availability	Available to Priority Users in selected areas

* Bandwidth options for each Bitstream Service are detailed in each Bitstream Service Description and further options can be developed using the Product Development Process.

3.6.6 The standard ONT for the Bitstream 3 Accelerate Service supports four 100/1000 Ethernet UNIs and two ATA Voice ports. Additional configurations are available on request.

UNI – NNI characteristics

3.6.7 The Bitstream 3 Accelerate Service requires a dedicated UNI. Additional UNIs can be used for additional instances of the Bitstream 2 Service, Bitstream 2 Accelerate Service, Bitstream 3a Service or Bitstream 3a Accelerate Service.

3.6.8 The sum of High Priority traffic profiles of all services delivered at a UFB Handover Connection can exceed the UFB Handover Connection Service line rate. If there is insufficient line rate to deliver the High Priority traffic then frames will be randomly discarded and Service Levels do not apply. It is therefore the Service Provider's responsibility to shape and queue traffic appropriately.

New Service Template Options

- 3.7 A Service Provider may request that the LFC creates additional Service Templates as follows:
- 3.7.1 Additional Service Templates can be created using combinations of one more of the following set of standard building blocks:
- (a) Point-to-Point single VLAN Ethernet Bitstream service (E-AVPL) service using High Priority and Low Priority combinations as set out in the Service Description for the Bitstream 2 Service or the Bitstream 2 Accelerate Service. Multiple E-AVPLs can be configured on the same or on different UNIs;
 - (b) Point to Point VLAN (E-APL) service using High Priority combinations as set out in the Service Description for the Bitstream 3 Service or the Bitstream 3 Accelerate Service noting that E-APL and E-AVPL VLANS must be on separate UNIs ;
 - (c) Point to Point VLAN (E-APL) service using High Priority and Low Priority combinations as set out in the Service Description for the Bitstream 3a Service or the Bitstream 3a Accelerate Service noting that E-APL and E-AVPL VLANS must be on separate UNIs;
 - (d) Multicast VLAN Ethernet Bitstream service (EMA) using High Priority (CIR) only as set out in the Service Description for the Multicast Service;
 - (e) ATA Voice port as set out in the Service Description for ATA Voice;
 - (f) UNI (100/1000 Base-T) port;
 - (g) WiFi; and
 - (h) Other services or attributes requested by the Service Provider and agreed by the LFC.
- 3.7.2 Bitstream 3 Accelerate High Priority traffic combinations can be created using increments of 2.5 Mbps upstream and/or downstream.
- 3.8 Service Templates can be added as primary or secondary Service Templates and have the following characteristics:
- 3.8.1 Primary Service Templates must include Baseband. A primary Service Template does not require the End User connection to consume any other Service Templates in order for the services to be provided.
- 3.8.2 Secondary Service Templates can be added as an additional service to an End User who is already consuming one or more Service Templates.
- 3.8.3 Baseband is a required service for all End User connections. If the Primary Service Template is removed from an End User connection and one or more secondary Service Templates remain, then either a secondary Service Template needs to be changed to a primary Service Template, or all of the secondary Service Templates will be removed by the LFC.
- 3.9 Requests for additional Service Templates will be implemented and delivered through the Product Development Process. The Product Development Process includes determination of pricing, development, testing and implementation.
- 3.10 The LFC will comply with the Service Provider's request under clause 3.7 in a timely manner. In the event that demand for new Service Templates exceeds the LFC's capacity to deliver the new Service Templates then the LFC may prioritise the Service Template requests in accordance with the Operations Manual.

Operations, Administration and Maintenance

- 3.11 The Bitstream 3 Accelerate Service will support Service Provider remote access to the ONT via a service management gateway for appropriate management. A Service Provider may request particular management attributes via the Product Development Process.
- 3.12 The Bitstream 3 Accelerate Service will support Ethernet Service Operations and Maintenance (OAM) for service integrity testing, fault diagnostics and performance measurement using ITU Y.1731. OAM capability will be phased in as the functionality is developed and deployed in scale and may be updated or amended by the LFC from time to time.

Service Requirements

- 3.13 To use the Bitstream 3 Accelerate Service the Service Provider must have the capability to access and interconnect with it, by one of the following:
- 3.13.1 co-locating Service Provider equipment at the POI using the UFB Handover Connection Service and Central Office and POI Co-location Service;
 - 3.13.2 connecting to third party co-location space at the POI using the UFB Handover Connection Service, and with the third party taking the Central Office and POI Co-location Service;
 - 3.13.3 connecting to a backhaul service at the POI; or
 - 3.13.4 by using the Direct Fibre Access Service to connect to Service Provider equipment at a remote location within the Central Office area.

The location of the POIs is detailed in the Operations Manual appendices.

Additional Service Characteristics

- 3.14 The technical specification of the Bitstream 3 Accelerate Service is set out in Appendix B.
- 3.15 The LFC will provide certain support and other assistance as part of the Bitstream 3 Accelerate Service including:
- 3.15.1 an automated facility for Service Requests;
 - 3.15.2 an automated facility for fault notifications; and
 - 3.15.3 a tool to assist the Service Provider in determining the location and availability of the Bitstream 3 Accelerate Service (pre-qualification),
- each as more particularly set out in the Operations Manual.
- 3.16 The Bitstream 3 Accelerate Service specifically excludes:
- 3.16.1 the UFB Handover Connection Service;
 - 3.16.2 provision or maintenance of any cabling or connection or active device:
 - (a) beyond the Service Demarcation Points described in clauses 4.1 and clause 5.1;
 - (b) between the jack terminating the LFC provided Fibre Lead-in and the ONT where that cabling or connection is not provided by the LFC and the LFC has not agreed to take responsibility for that cabling or connection.
 - 3.16.3 configuration, monitoring, operation, on-going support or maintenance of Service Providers' or End User's applications, equipment or networks; and
 - 3.16.4 supply of AC mains & UPS power, accommodation space, heating, ventilating, and air conditioning and other similar services and facilities at the POI or End User Premises, Service Provider Premises or NBAP (as applicable).

4 Service Demarcation Point at End User Premises, Service Provider Premises or NBAP (as applicable)

- 4.1 The Service Demarcation Point at the End User Premises, Service Provider Premises or NBAP (as applicable) is the 100/1000Base-T UNI on the ONT.
- 4.2 The Bitstream 3 Accelerate Service excludes the End User Premises, Service Provider Premises or NBAP (as applicable) wiring. If a fault reported by the Service Provider is found to be caused by the End User Premises, Service Provider Premises or NBAP (as applicable) equipment (CPE) or the wiring at the End User Premises, Service Provider Premises or NBAP (as applicable) beyond the Service Demarcation Point, then the Service Provider may be charged the "No fault found" Ancillary Charge in the Price List. Note the wiring should comply with the industry standard Premises wiring requirements which are available at www.tcf.org.nz.

5 Service Demarcation Point at POI

- 5.1 The Bitstream 3 Accelerate Service is delivered as a transparent VLAN (the logical Service Demarcation Point) on the UFB Handover Connection located at the POI.
- 5.2 The physical Service Demarcation Point is the MOFDF in the POI, which is part of the UFB Handover Connection Service.
- 5.3 The UFB Handover Connection Service is a separate service and is a prerequisite to the supply of the Bitstream 3 Accelerate Service i.e. Service Provider's must first purchase and then continue to maintain a UFB Handover Connection Service at all times while taking the Bitstream 3 Accelerate Service.

6 LFC and Service Provider Responsibilities

- 6.1 Other LFC and Service Provider responsibilities are detailed in the General Terms and the Operations Manual.


7 Fibre Diversity

- 7.1 The Bitstream 3 Accelerate Service provides a single fibre between the Central Office and the End User Premises, Service Providers Premises or NBAP (as applicable).
- 7.2 Diversity (a second or subsequent instance of the Bitstream 3 Accelerate Service between the Fibre Access Point and the Central Office) will be available as an option for some but not all Premises. Standard Installation Charges and Service Levels do not apply to the provision of the diverse products that involve diverse access to the End User Premises or Service Providers Premises or NBAP (as applicable) or access to a Central Office that is not the local Central Office. Each instance of the Bitstream 3 Accelerate Service, primary and diverse, will be treated as an individual line for the purpose of availability Service Levels.
- 7.3 Where available the diverse optical paths will be in separate fibre cable sheaths, and if requested in separate cable routes. The diverse cable routes will be a minimum of the width of a street apart, and should not share any manholes or access points. Separate entries into the Central Office will also be used where available.
- 7.4 The Service Provider can also request diverse access to End User Premises or Service Providers Premises or NBAP (as applicable), or access to diverse Central Offices as part of a Non-Standard Install; however this will not be available in all cases.
- 7.5 There may be practical limitations to providing full physical diversity to some sites. The provision of a separate entry to an LFC Central Office will have unique site specific engineering considerations and may attract additional costs.

8 Bitstream 3 Accelerate Service Levels

8.1 Service Levels for both the Layer 1 and Layer 2 components of the Bitstream 3 Accelerate Service are set out in the Service Level Terms for the Bitstream Services.

Appendix A – Diagram

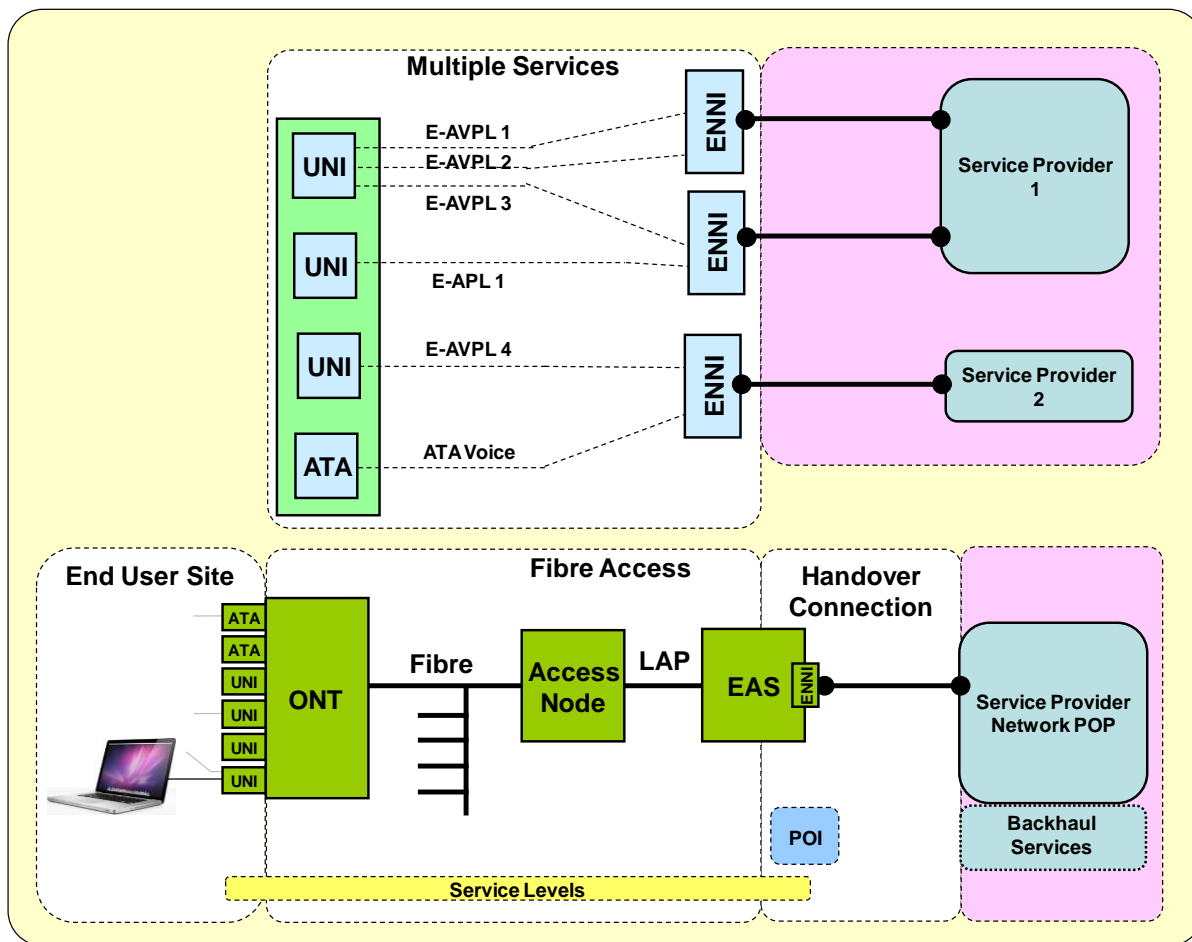

This is a generic diagram showing the standard configuration and service demarcation points. It is not intended to represent every situation or detailed physical architecture. The following points should be noted:

- The Bitstream 3 Accelerate service and pricing applies from the UNI to the E-NNI at the POI.
- Service Levels (availability, network performance) only apply to UNI to the E-NNI at the POI.
- Access node and aggregation interconnection may use redundant links to meet Service Level requirements.

The Bitstream services support simultaneous delivery of multiple Service Templates from the same or multiple Service Providers as follows:

- Multiple E-AVPLs can be delivered to the same UNI.
- An E-APL service requires a dedicated UNI.
- An ATA Voice Service can be considered an E-AVPL with an ATA Voice port at the End User interface. The class and bandwidth characteristics of this E-AVPL are optimised for voice.
- All services delivered to a UNI must belong to the same Service Provider but can be mapped to the same or different E-NNIs.
- The initial Bitstream 3 Accelerate Service Templates contain a single E-APL with 11 bandwidth options and one ATA Voice Service.

Appendix B – Technical Specification

Technical Specification	
Ethernet	<ul style="list-style-type: none"> • IEEE 802.3 – 2005 • 802.1q supporting 4093 VLANs
UNI	<p>ONT supports:</p> <ul style="list-style-type: none"> • 4 x UNI • 2 x ATA Voice ports • Optional additional ports: <ul style="list-style-type: none"> ○ RF Overlay port ○ WiFi <p>Per UNI:</p> <ul style="list-style-type: none"> • 100/1000Base-T
UFB Handover Connection (E-NNI)	<p>Ethernet:</p> <ul style="list-style-type: none"> • 802.1ad VLAN (SVID, CVID); or • Double tagged QnQ.
VLAN	<p>Point-to-Point (E-APL) MTU 2000 Bytes Unicast Frame Delivery = passed within service CIR Multicast Frame Delivery = passed within service CIR Broadcast Frame Delivery = passed within service CIR Layer 2 Control Protocols Processing = Initially none (but may be amended by the LFC from time to time)</p>
Fibre	<p>External fibre must comply with ITU-T specification G.652D.</p> <p>Internal building fibre cables must meet appropriate fire regulations i.e. be Flame-Retardant, Non Corrosive, Low Smoke, Zero Halogen (FRNC/LSZH).</p> <p>Fibre terminations must be SC/APC type connectors (complying with the IEC 61754-4 standard) or as an alternative LC/APC also known as LCA type connectors (complying with the IEC 61754-20 standard) as appropriate.</p> <p>Laser types and path characteristics expected to be designed to a minimum standard which are contained in either IEEE 802.3 Section 5 standard or ITU-T G.984 (GPON) standards.</p> <p>Testing for power loss will be at either 1310 or 1550 nm</p> <p>The wavelengths of 1625 nm and 1650nm are reserved for network maintenance testing purposes, compliant with ITU-T L.41.</p>